



MorganAM&T™

National® Wind Power Brushes

- **Global Technology Company**
- **100+ Years Manufacturing Experience**
- **Same Day Emergency Service**
- **Proven Solutions for the Wind Power Market**

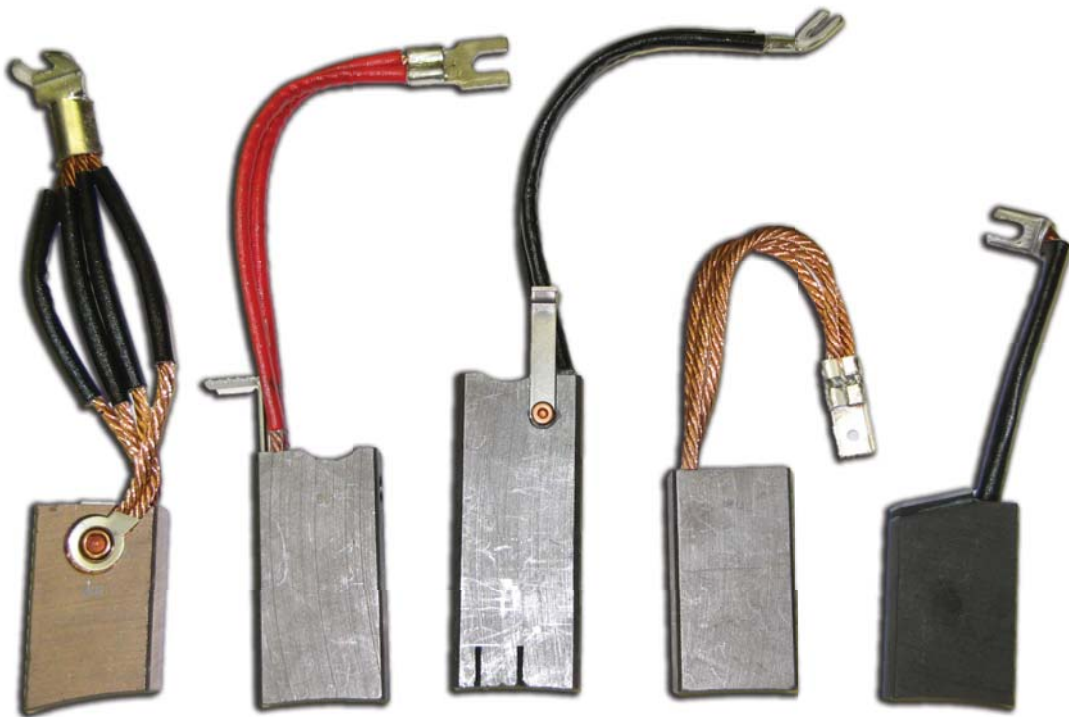

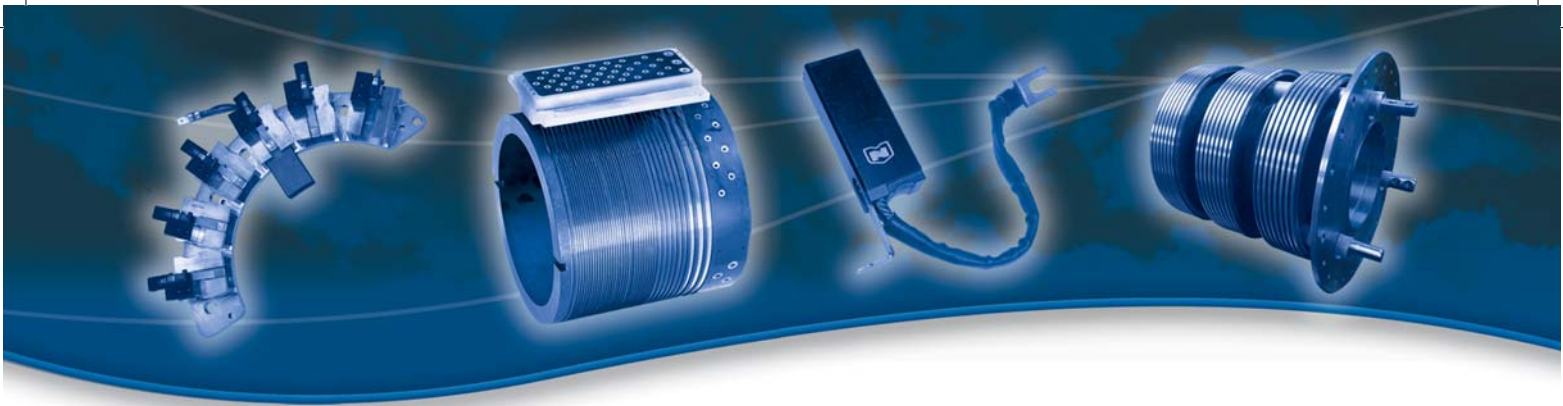

Wind Power Brush Grades

Brush Grade	Resistivity Ω -in. ($\mu\Omega$ -m)	Density g/cm^3	Flexural Strength lbf/in^2 (MPa)	Normal Current Density A/in^2 (A/cm^2)
537	.0003 7.6	2.77	3200 22	100 15.5
M2650	.000125 3.2	2.80	3500 24	100 15.5
M2665	.000025 0.6	3.50	3800 26	110 17.1
M2675	.000008 0.2	4.25	3200 22	125 19.4
L4	.000014 0.4	4.57	3100 21	125 19.4
M407	.000008 0.2	5.10	2400 17	150 23.3

- Exceptional Performance from No Load to High Load
- Superior Film Formation for Low Friction
- Outstanding Performance in Varying Atmospheric Conditions
- Tolerant of the Harmful Effects of Contamination
- Excellent Brush Life with Minimal Ring Wear
- Solutions include: ABB, Winergy, Hitachi, VEM, Gamesa, Suzlon


MorganAM&T™ 251 Forrester Drive • Greenville, SC 29607-5328 USA • 1.800.543.6322
www.morganamt.com

The data in this product bulleting relates only to the specific material designated herein and does not relate to use in combination with any other material or in any process. We believe that the information contained herein is current as of the date of the Product Bulletin. Since the use of this information and these opinions and the conditions of use of the product are not within the control of Morgan AM&T, it is the user's obligation to determine the conditions of safe use of the product. This information is not to be taken as a warranty or representation for which we assume legal responsibility nor as permission or recommendation to practice any patented invention without a license. It is offered solely for your consideration, investigation and verification.

